

## P FILTERS

### Highlights

- Injected polypropylene : great resistance to acids and alkalines
- Up to 40 m<sup>2</sup> of filtration area
- Monoblock injected tank without welding
- Side pannels protecting the pump from splashes
- Large interchangeable range of filtration medias
- Entirely customizable : Individual operation, double, parallel, series and Bypass instantly
- Dissolution and draining tank version : enables the addition of additives, the dissolution of salts, the use of filter aid or activ carbon powder as well as the draining of filtration tanks.




### Technical features

<b>Materials</b>	PP
<b>Gaskets</b>	EPDM - FPM
<b>Max temperature</b>	80°C
<b>Filtration rate</b>	0,2 -> 100 µm
<b>Pumps</b>	2 x A27 - 2 x A30 - 2 x M290 - 2 x M390
<b>Flowrate</b>	80 m <sup>3</sup> /h
<b>Connectipon</b>	Threaded, Union nut, grooved nozzle, flanges
<b>Dissolution tank</b>	100L
<b>Options</b>	OILTECH container : PP microfibres, bag filtration: BAGTECH

### Filtration medias



### Flowrate charts

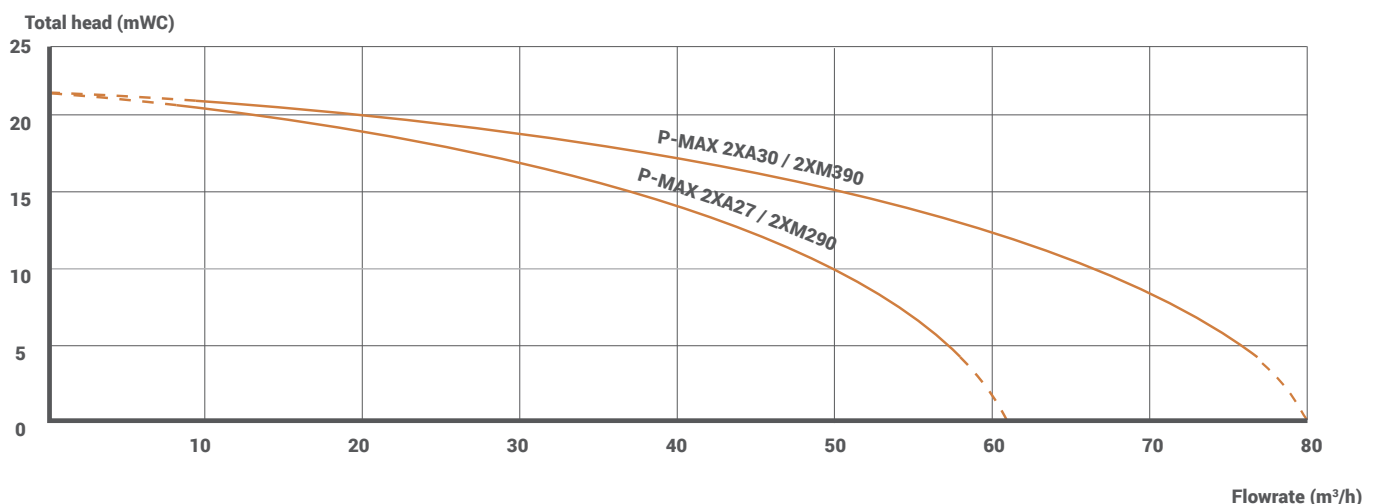

### Dimensions

